



RFS CDS**E series Directional Coupler has been designed for outdoor applications covering 694 to 3800MHz. Units couple off a defined fraction of signal from 6 to 30 dB with minimal reflections or loss. The frequency range allows use with antennas and leaky cable systems and in wireless base stations. With minimal solder joints, the dissipative loss has been minimized and reliability enhanced.

FEATURES / BENEFITS

- 6 dB coupling value
- Low insertion loss
- High power handling
- Small size, Low weight
- N-female connectors
- -155 dBc PIM

**Technical features****STRUCTURE**

Product Type		Directional Coupler
Techn. Application		Indoor
Number of Input Ports		1
Number of Output Ports		2
Connector Type		N female

ELECTRICAL SPECIFICATIONS

Frequency Range	MHz	694 - 3800
Impedance	Ohm	50
Insertion Loss max.	dB	1.7
Max. VSWR / Return Loss	VSWR/dB	1.25/19.1 (1.25)
Intermodulation (IM3)		-155 dBc with 2x43 dBm tones
Coupling Value	dB	6
Directivity min.	dB	20
Coupling Flatness max.	dB	±0.8
Total Input Power	W	200

TEMPERATURE SPECIFICATIONS

Temperature Range	°C (°F)	-25 to +65 (-13 to +149)
-------------------	---------	--------------------------

MECHANICAL SPECIFICATIONS

Height	mm (in)	18 (0.71)
Width	mm (in)	58.2 (2.3)
Length	mm (in)	159.4 (6.28)
Weight	kg (lb)	0.24 (0.53)


TESTING AND ENVIRONMENTAL

Environmental Class		IP65
---------------------	--	------



CDS6E-694/3800

6dB Directional Coupler

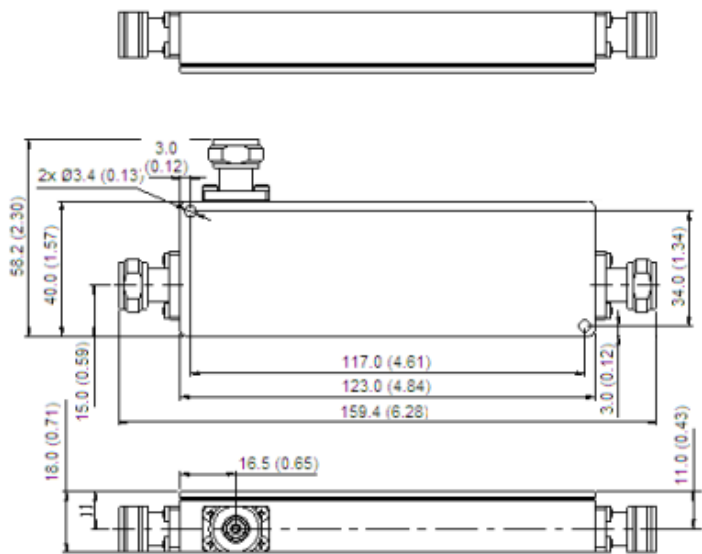

Dimensions mm(inch)

External Document Links

Notes