


VMB

Vloer- en muurbeugel

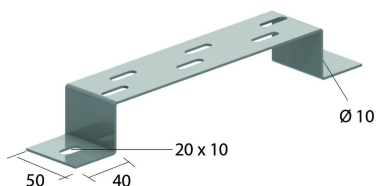

Geschikt voor gebruik als vloer-, muur- en ophangbeugel.

Max. Belasting: 200 daN

Stand. Uitv.

Sendzimir

Mat. Opt.

Hot-Dip

Mat. Opt. PE

Poedercoating

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
HD	VMB100	40	100			0,190	12	X	STK
HD	VMB150	40	150			0,220	12	X	STK
HD	VMB200	40	200			0,260	12	X	STK
HD	VMB300	40	300			0,330	12	X	STK
HD	VMB400	40	400			0,390	6	X	STK
HD	VMB500	40	500			0,460	6	X	STK
HD	VMB600	40	600			0,530	6	X	STK

Te bestellen per volle verpakking.

Vloer- en ophangbeugel: montage met VFCL.

Muurbeugel: montage met VFK.