

# CELLFLEX<sup>®</sup> Coaxial Cables

## Shipping and Drum Information





RFS offers both **standard** and **premium drums** to accommodate your shipping and packing requirements

Radio Frequency Systems (RFS) carefully selects proper reel sizes based on the length and overall diameter of the cable to be wound. A reel not matched to the weight of the cable could be damaged during shipment. Additionally, all

cable has a minimum safe bending radius. If it is subjected to bends sharper than the minimum radius, damage to the material is likely.


### Premium Reels

- **Robust** wood construction
- Available in **different lengths**
- **Enhanced outdoor storage** capabilities (typ. > 6 months)

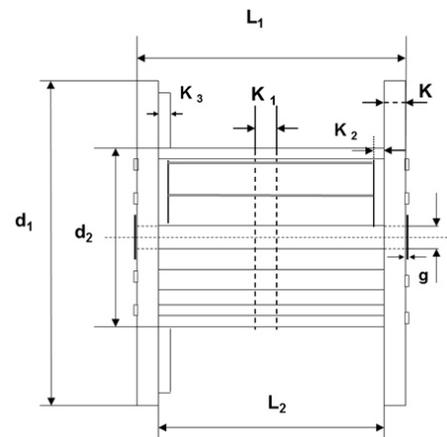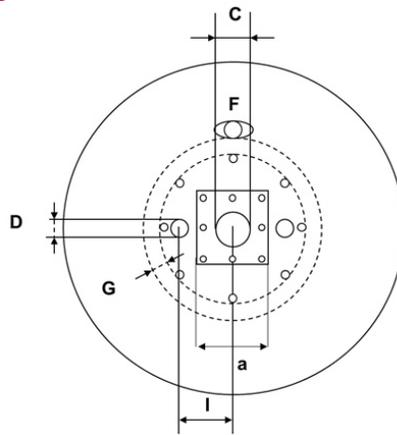

### Standard Reels

- **Cost-efficient** plywood construction
- For standard 500m lengths
- Suitable for outdoor storage over a limited period of time (typ. 3 months)

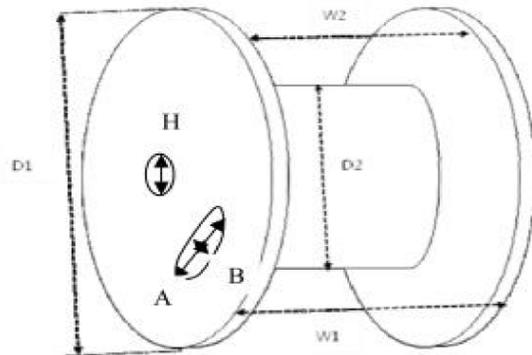

## Premium Shipping and Drum Information

| Cable Size | CELLFLEX Cable Types (all jackets and variants) | Drum Type | Capacity (m) | L1 ±5mm (mm) | d1 (mm) | Weight (kg) |
|------------|---|-----------|--------------|--------------|---------|-------------|
| 1/4"       | SCF14   | L08xx     | 2388         | 527          | 850     | 27          |
|            | LCF14   | L08xx     | 1399         | 527          | 850     | 27          |
| 3/8"       | SCF38   | L08xx     | 1384         | 527          | 850     | 27          |
|            | LCF38   | L08xx     | 1074         | 527          | 850     | 27          |
| 1/2"       | SCF12   | L08xx     | 780          | 527          | 850     | 27          |
|            |   | L11xx     | 2188         | 770          | 1120    | 55          |
|            | LCF12   | L08xx     | 577          | 527          | 850     | 27          |
|            |   | L11xx     | 1599         | 770          | 1120    | 55          |
| 7/8"       | LCF78   | L15xx     | 3101         | 964          | 1500    | 96          |
|            |   | L11xx     | 530          | 770          | 1120    | 55          |
|            |   | L15xx     | 1151         | 964          | 1500    | 96          |
|            |   | L18xx     | 1764         | 1088         | 1800    | 170         |
|            |   | H2181     | 2179         | 1120         | 2140    | 358         |
| A2180      | 2533  | 1120      | 2140         | 229          |         |             |
| 1-1/4"     | LCFS114   | L15xx     | 589          | 964          | 1500    | 96          |
|            |   | L18xx     | 920          | 1088         | 1800    | 170         |
|            |   | H2181     | 1137         | 1120         | 2140    | 358         |
|            |   | A2180     | 1240         | 1120         | 2140    | 229         |
|            |   | A2580     | 1566         | 1405         | 2500    | 537         |
|            |   | H2586     | 1614         | 1520         | 2500    | 541         |
| 1-5/8"     | LCF158  | L15xx     | 195          | 964          | 1500    | 96          |
|            |   | L18xx     | 550          | 1088         | 1800    | 170         |
|            |   | H2181     | 599          | 1120         | 2140    | 358         |
|            |   | A2180     | 635          | 1120         | 2140    | 229         |
|            |   | A2580     | 774          | 1405         | 2500    | 537         |
|            |   | H2586     | 1074         | 1520         | 2500    | 541         |

## Standard Shipping and Drum Information

| Cable Size | CELLFLEX Cable Types (all jackets and variants) | Capacity (m) | D1 (mm)  | W1 (mm) | Weight (kg) |
|------------|---|--------------|----------|---------|-------------|
| 1/4"       | SCF14   | 510          | 460± 10  | 330± 5  | on request  |
|            | LCF14   |              | 600±10   | 400± 5  | on request  |
| 3/8"       | SCF38   |              | 510± 10  | 400± 5  | on request  |
|            | LCF38   |              | 600± 10  | 530± 5  | on request  |
| 1/2"       | SCF12   |              | 700±10   | 530± 5  | 19          |
|            | LCF12   |              | 750±10   | 530± 5  | 19          |
| 7/8"       | LCF78   |              | 1120± 15 | 710±10  | 41          |
| 1-1/4"     | LCFS114   |              | 1600± 15 | 720±10  | on request  |
| 1-5/8"     | LCF158  |              | 2000±20  | 740± 10 | on request  |