



TFCL85S

TFCL met SIN

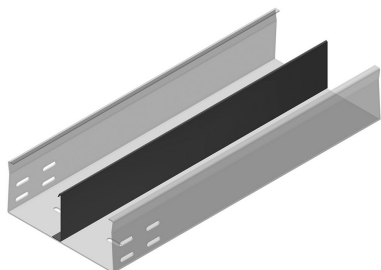

Te bevestigen met:



Koppelplaat
V60.200

Stand. Uitv.				Sendzimir					
Mat. Opt.				Hot-Dip					
Mat. Opt. PE				Poedercoating					
HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Eenh.
HD	TFCL85.100.200S12	85	100	2	3000	5,110	30		M
HD	TFCL85.100.200S13	85	100	2	3000	5,110	30		M
HD	TFCL85.150.200S12	85	150	2	3000	5,910	30		M
HD	TFCL85.150.200S13	85	150	2	3000	5,910	30		M
HD	TFCL85.150.200S23	85	150	2	3000	6,590	30		M
HD	TFCL85.200.200S12	85	200	2	3000	6,710	30		M
HD	TFCL85.200.200S13	85	200	2	3000	6,710	30		M
HD	TFCL85.200.200S23	85	200	2	3000	7,390	30		M
HD	TFCL85.250.200S12	85	250	2	3000	7,510	30		M
HD	TFCL85.250.200S13	85	250	2	3000	7,510	30		M
HD	TFCL85.250.200S23	85	250	2	3000	8,190	30		M
HD	TFCL85.300.200S12	85	300	2	3000	8,310	30		M
HD	TFCL85.300.200S13	85	300	2	3000	8,310	30		M
HD	TFCL85.300.200S23	85	300	2	3000	8,990	30		M

S12: 1 scheidingsschot in het midden van de kabelgoot
 S13: 1 scheidingsschot op 1/3 van de rand van de kabelgoot
 S23: 2 scheidingsschotten op 1/3 van de rand van de kabelgoot