



Point LED 15 W 3000K 45 ° White for tracks

BASIC DATA

Code	PX4089086
EAN	5907769498091
Weight	1,00 kg

Application: shopping centers, art galleries, receptions, waiting rooms

Category of luminaire: spotlight

MECHANICAL DATA

Type of installation	for tracks
Housing material	Aluminum
Electrical track connection	yes

OPTICAL DATA

Reflector	High gloss
-----------	------------

ELECTRICAL DATA

Light source	LED
Luminaire power	15 W
Number of light sources	1
Light source power	13W
Type of equipment	AC
For emergency lighting	No
Voltage rating	220 ... 240 V
Light source included	yes

INFORMATION

Colour	White
Operating temperature range	0 ... 35 °C
Rotated model	yes


LIGHT DATA

Light source luminous flux	1910 lm
Luminaire luminous flux	1300 lm
Light source luminous efficacy	147 lm/W
Luminaire's luminous efficacy	87 lm/W
Luminaire's luminous efficiency	69 %
Light colour	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I
Beam angle	45 °
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 60000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	91 %
Colour temperature	3000K

CERTIFICATES

Degree of protection (IP)	IP20
Degree of protection (IP) /top/	IP20
Class of protection	I
Energy class	A+
CE	yes

DIMENSIONS

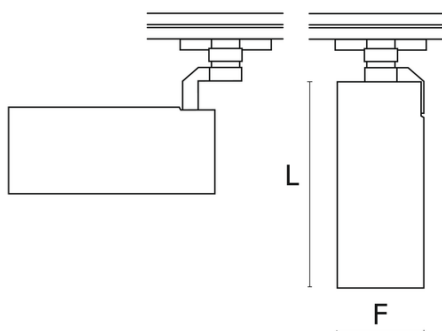

L [mm] | F [mm]

180

80

L = Length | F = Outer diameter

ACCESSORIES

Optical element



PX4089260

Point LED Shutter honeycomb