


DR15.30 Draagprofiel

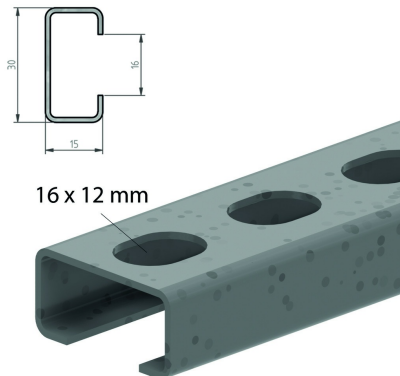

Max. Belasting: 100 daN

Stand. Uitv.

Sendzimir

Mat. Opt.

Hot-Dip

Mat. Opt. PE

Poedercoating

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
HD	DR100	15	30		100	0,060	10	X	STK
HD	DR150	15	30		150	0,080	10	X	STK
HD	DR200	15	30		200	0,110	10	X	STK
HD	DR250	15	30		250	0,130	10	X	STK
HD	DR300	15	30		300	0,160	10	X	STK
HD	DR350	15	30		350	0,190	10	X	STK
HD	DR15.30.2000	15	30		2000	0,600	40		M

Te bevestigen met twee draadstangen TIM8 + moer M8 + CRO8.
Bestel steeds breedte kabelbaan + 50 mm.