



Image for the product family

Bari ECO DLN IP65 LED 19W 3000K

BASIC DATA

Code	DN003.1166.830.A000 PX1487329
EAN	5907769492846
Weight	1,80 kg

Application: corridors, conference rooms, receptions, waiting rooms, toilets, arcades, research laboratories

Category of luminaire: downlight, clean room luminaire

MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Aluminum

OPTICAL DATA

Diffuser material	Transparent glass
Reflector	High gloss

ELECTRICAL DATA

Light source	LED
Luminaire power	19W
Number of light sources	1
Light source power	17W
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	yes

INFORMATION

Colour	White
Operating temperature range	-20 ... 40 °C


LIGHT DATA

Light source luminous flux	2770 lm
Luminaire luminous flux	1990lm
Light source luminous efficacy	163 lm/W
Luminaire's luminous efficacy	105 lm/W
Light colour	White
Color rendering index	84
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	86 %
Colour temperature	3000K

CERTIFICATES

Degree of protection (IP)	IP65
Class of protection	I
CE	yes
PZH	yes
HACCP+	yes
EAC	yes

DIMENSIONS

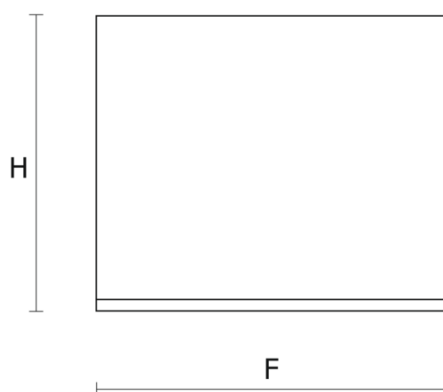

H [mm]	F [mm]
--------	--------

188	245
-----	-----

H = Height / Depth | F = Outer diameter

ACCESSORIES

Installation elements



FS005.11.1500

FS005.11.3000

FS005.22.1500

FS005.22.3000

FS005.33.1500

FS005.33.3000

Bari DLN LED 3x Suspension set