



RFS TPS\* Tapper product family has been designed to support a variety of wireless applications in the frequency band from 694 to 3800MHz. The units couple off a defined fraction of a RF signal from typically 3 to 30 dB with minimal reflections or loss. The broad frequency range is ideally suited for 3G / 4G / 5G multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables. Notably, these products feature a low level of network interferences due to their PIM optimized desing.

**FEATURES / BENEFITS**

- Split ratio 10:1 / 10dB
- 4.3-10-female interfaces
- PIM optimized design (160dBc @2x43dBm)
- Low insertion loss
- High power handling
- Small size, Low weight

**Technical features****STRUCTURE**

Product Type		Unequal Divider/Tapper
Techn. Application		Indoor
Number of Input Ports		1
Number of Output Ports		2
Connector Type		4.3-10 female

**ELECTRICAL SPECIFICATIONS**

Frequency Range	MHz	694 - 3800
Impedance	Ohm	50
Insertion Loss max.	dB	0.5
Max. VSWR / Return Loss	VSWR/dB	1.30/17.7 (1.3)
Intermodulation (IM3)		160dBc (2x43dBm)
Coupling Value	dB	10.5
Coupling Flatness max.	dB	+1.0 / -2.0
Power Ratio - between Outputs	dB	10:1 / 10dB
Total Input Power	W	400

**TEMPERATURE SPECIFICATIONS**


Temperature Range	°C (°F)	-25 to +65 (-13 to +149)
-------------------	---------	--------------------------

**MECHANICAL SPECIFICATIONS**

Height	mm (in)	49.7 (1.96)
Width	mm (in)	19.5 (0.77)
Length	mm (in)	84.3 (3.32)
Weight	kg (lb)	0.32 (0.71)

**TESTING AND ENVIRONMENTAL**

Environmental Class		IP65
---------------------	--	------

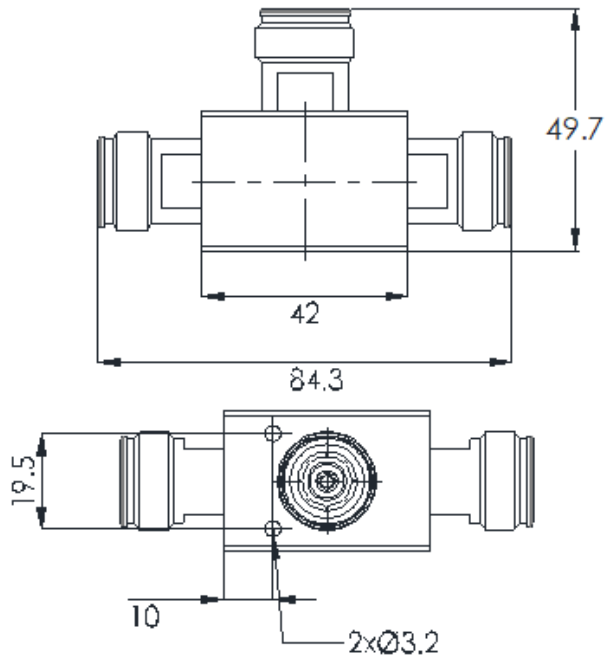

External Document Links

Notes