



Modena Mini LED 10W 4000K White

BASIC DATA

Code	EA001.1111.840.A000
EAN	5907769475337
Weight	1,00 kg

Application: corridors, receptions, waiting rooms, toilets, arcades

Category of luminaire: plafond

MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Polycarbonate

OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic

ELECTRICAL DATA

Light source	LED
Luminaire power	10W
Number of light sources	1
Light source power	9W
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	yes
Power factor	0,96

INFORMATION


Colour	White
Operating temperature range	-20 ... 40 °C
Dimmable	No
Rotated model	No

LIGHT DATA

Light source luminous flux	1620 lm
Luminaire luminous flux	1120lm
Light source luminous efficacy	176 lm/W
Luminaire's luminous efficacy	112 lm/W
Light colour	White
Color rendering index	84
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85%
Colour temperature	4000K

CERTIFICATES

Degree of protection (IP)	IP54
Degree of protection (IP) /top/	IP54
Impact resistance	IK10
Class of protection	I
Light source protection	yes
CE	yes
PZH	yes
HACCP+	yes
EAC	yes

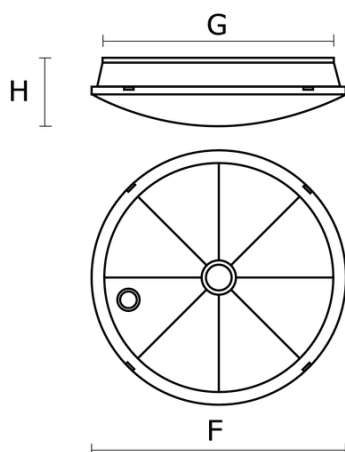

DIMENSIONS

H [mm]	F [mm]	G [mm]
90	315	285

H = Height / Depth | F = Outer diameter | G = Inner diameter