

## Parabolic LED 40W 4000K 600x600 3x

### BASIC DATA

Code	BU001.1133.840.A000 PX2070108
EAN	5907769472183
Weight	5,00 kg

**Application:** offices, conference rooms, classrooms, corridors, public facilities, commercial facilities, educational and upbringing facilities, rooms of entities performing medical activities, production and storage rooms of the cosmetics and food industry

**Category of luminaire:** coffer indoor luminaire

### MECHANICAL DATA

Type of installation	For 600x600 ceiling
Housing material	Steel sheet

### OPTICAL DATA

Louver/ shutter	PAR
Diffuser material	Prismatic plastic
Louver material	Aluminum
Reflector	High gloss

### ELECTRICAL DATA

Light source	LED
Luminaire power	40W
LED modules	3x
Number of light sources	3
Light source power	12,5W
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	yes
Power factor	0,98

### INFORMATION


Colour	White
Operating temperature range	-15 ... 40 °C
Info	600x600

### LIGHT DATA

Light source luminous flux	5880 lm
Luminaire luminous flux	4980lm
Light source luminous efficacy	161 lm/W
Luminaire's luminous efficacy	124 lm/W
Light colour	White
Color rendering index	84
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %
Colour temperature	4000K

### CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	yes
CE	yes
PZH	yes
ENEC	yes
HACCP+	yes
EAC	yes

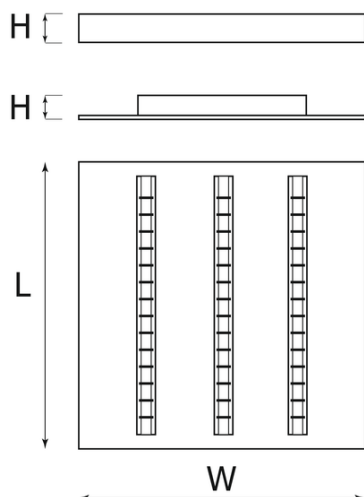

## DIMENSIONS

L [mm]	W [mm]	H [mm]
596	596	41

L = Length | W = Width | H = Height / Depth

## ACCESSORIES

### Electric elements



FS004.11.1500

PX0922066

FS004.22.1500

PX0922062

Electrical suspension Y

### Installation elements



FL009.11.6060

PX2070180

Cardboard installation frame for 600x600 version



FS003.00.1500

PX0922124

Simple suspension Y