
PXF LIGHTING

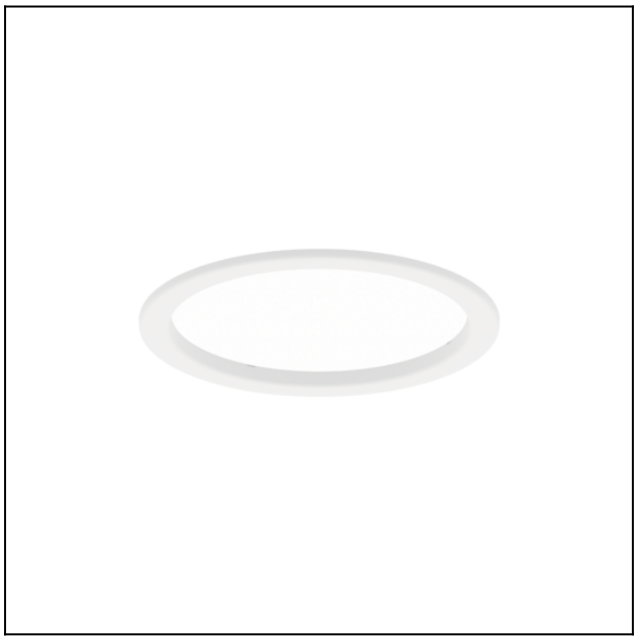

Bari Q LED 155 mm 11W 3000K

BASIC DATA

Code	EU001.1111.830.A000
EAN	5904312962221

Application: corridors,conference rooms,receptions, waiting rooms

Category of luminaire: downlight

OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic

ELECTRICAL DATA

Light source	LED
Luminaire power	11W
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	yes

INFORMATION

Colour	White
Info	155mm


LIGHT DATA


Luminaire luminous flux	1480lm
Luminaire's luminous efficacy	135 lm/W
Light colour	White
Light distribution	DI
Light output degradation	B10
Lumen maintenance	L70
Lifetime	> 50000 h
Colour temperature	3000K

CERTIFICATES

Degree of protection (IP)	IP44
Degree of protection (IP) /top/	IP20
Class of protection	II
Light source protection	yes
CE	yes
PZH	yes
HACCP+	yes

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033





DIMENSIONS

H [mm]	F [mm]	K [mm]	J [mm]
40	155	15	13

H = Height / Depth | F = Outer diameter | K = Additional dimension | J = Additional dimension

ACCESSORIES

Structural element



FL030.11.0155
-

BARI Q LED Surface mounting housing

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033